



LINEA TOOLFUSE

AL 4125 C


ALLINEATORE / ALIGNMENT CLAMP 32 ÷ 125 mm

Allineatore con sistema di fissaggio a cinghie. Campo d'impiego 32÷125 mm. Realizzato in acciaio zincato è equipaggiato con 3 bracci di supporto rendendolo idoneo per figure 45° e 90° e Tee.


Robusto e pratico può essere dotato a richiesta di dispositivo SRC per una regolazione continua in un campo 0°÷90°.

Alignment clamp comes with ratchet straps. Working range 32÷125 mm. It is manufactured in galvanized steel and it is equipped with 3 ways suitable as a 45° and 90° angle maker and for Tee fittings.

It is strong and handy and it can be supplied on request with the SRC system allowing a no-stop regulation in a working range 0°÷90°.

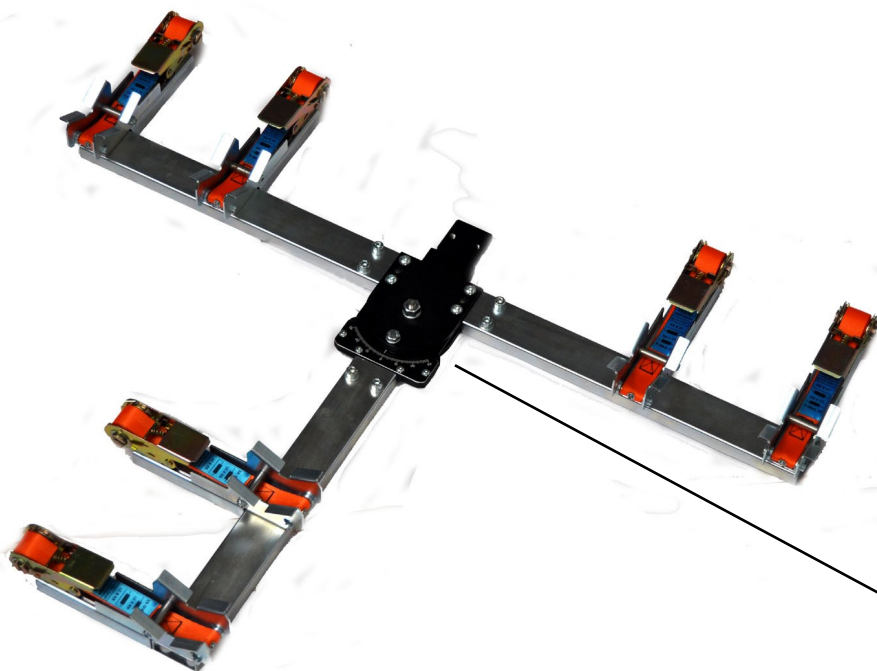

Versione con dispositivo SRC (a richiesta)
SRC regulation system version (on request)

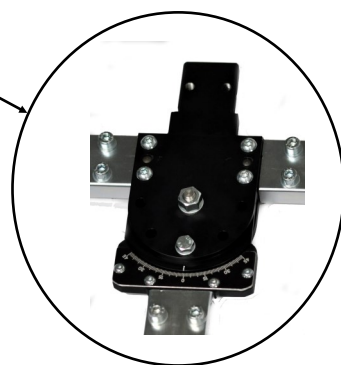

Dispositivo SRC
SRC regulation system

CARATTERISTICHE TECNICHE TECHNICAL CHARACTERISTICS

Sistema di fissaggio/ <i>Fixing system</i>	a cinghie / <i>ratchet straps</i>
N° Bracci / <i>Ways</i>	3(con 2 bracci a richiesta <i>with 2 ways on request</i>)
Campo d'impiego / <i>Working range</i>	32 ÷ 125 mm
Figure / <i>Fittings</i>	45°,90° ,Tee e manicotti <i>45°,90° ,Tee and couplers</i>
Dimensioni montato / <i>Dimensions assembled</i>	980 x 520 x 140 mm
Peso / <i>Weight</i>	9,2 kg




LINEA TOOLFUSE AL 4200 C - AL 4315 C

ALLINEATORI / ALIGNERS 40 ÷ 225 mm e / and 63 ÷ 315 mm

Allineatori con sistema di fissaggio a cinghie realizzato in acciaio zincato. Equipaggiati con 3 bracci di supporto sono ideali per figure 45° e 90° e Tee. Pratici e robusti possono essere dotati a richiesta di dispositivo SRC per una regolazione continua in un campo 0° ÷ 90°.

Galvanized steel alignment clamp with ratchet straps. It is equipped with 3 ways to operate as a 45° and 90° angle maker and with Tee fittings. The clamps of this line are strong and handy and they can be supplied on request with the SRC system allowing a no-stop regulation in a working range 0°÷90°.

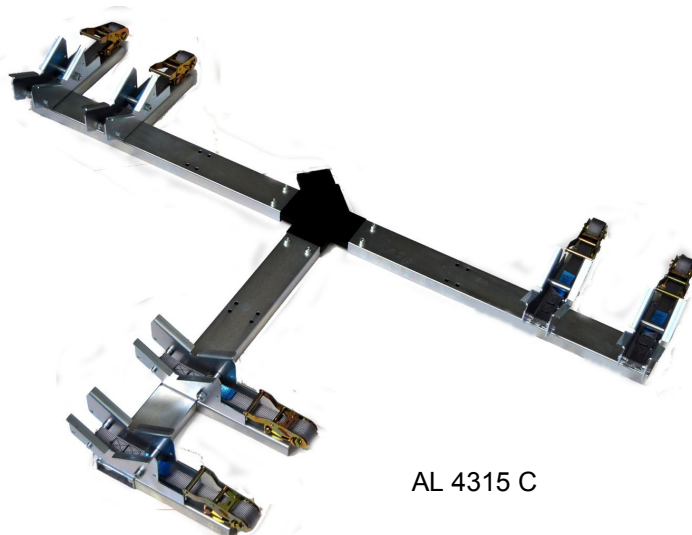


AL 4315 C

CARATTERISTICHE TECNICHE / TECHNICAL CHARACTERISTICS

	AL 4200 C	AL 4315 C
Sistema di fissaggio/ <i>Fixing system</i>	a cinghie / <i>ratchet straps</i>	a cinghie / <i>ratchet straps</i>
N° Bracci / <i>Ways</i>	3 (con 2 bracci a richiesta <i>with 2 ways on request</i>)	3 (con 2 bracci a richiesta <i>with 2 ways on request</i>)
Campo d'impiego / <i>Working range</i>	40 ÷ 225 mm	63 ÷ 315 mm
Figure / <i>Fittings</i>	45°, 90°, Tee, manicotti/ <i>couplers</i>	45°, 90°, Tee e manicotti/ <i>couplers</i>
Dimensioni montato <i>Dimensions assembled</i>	1280 x 650 x 195 mm	1370 x 650 x 195 mm
Peso / <i>Weight</i>	17,8 kg	18,9 kg



Dispositivo SRC
SRC regulation system

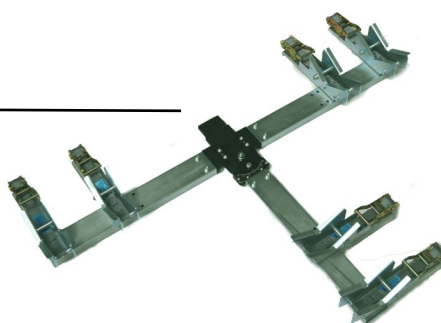

AL 4200 C con dispositivo SRC (a richiesta)
AL 4200 C with SRC regulation system (on request)